
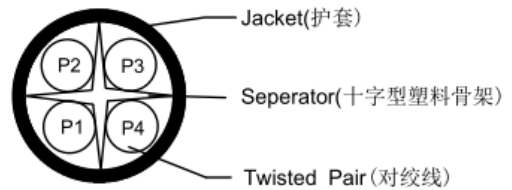



Cat.6 UTP Patch Cord

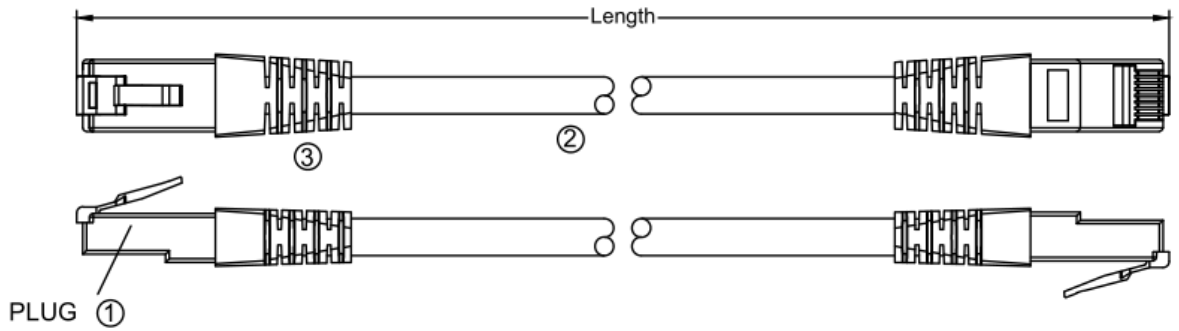

- P1 Blue&white/blue (蓝&白/蓝)
- P2 Orange&white/orange (桔&白/桔)
- P3 Green&white/green (绿&白/绿)
- P4 Brown&white/brown (棕&白/棕)

Product Description

Pin Assignment: 线位

Pos. No.	T568B WIRING 568B线位	Pos. No.
1	Orange 桔	1
2	White/Orange 白/桔	2
3	Green 绿	3
6	White/Green 白/绿	6
4	White/Blue 白/蓝	4
5	Blue 蓝	5
7	Brown 棕	7
8	White/Brown 白/棕	8

- All cable 100% channel testing, any open, missing wire, short and intermittent are not permitted.
- After crimping the distance between the bottom of contact and the top surface of plug are 5.90-6.146mm.
- The cable must be tested and passed the channel test with Fluke DSX-8000.
- RoHS compliant PVC or PE or LSZH Jacket.
- Installation temperature: -30°C to +50°C, minimum bending radius: 4D.

NO.	Item	QTY	Description
1	RJ45 PLUG	2 PCS	RJ45 8P8C Contact, phosphor Bronze 3u" , UL94V-0.
2	CABLE	1 PCS	CAT6 UTP 24AWG(7*0.18MM)*4P Stranded Cable Jacket, OD: 5.9±0.2MM
3	OVERMODE		48P PVC

For More Information:

Email: sales@telex.cn
www.telex.cn