

Fiber Optic Patch Cord



FC to FC OM2, duplex



LC to LC OM3, duplex




ST to ST OM3, duplex



FC to E2000 SM, simplex



LC to LC OM3, duplex

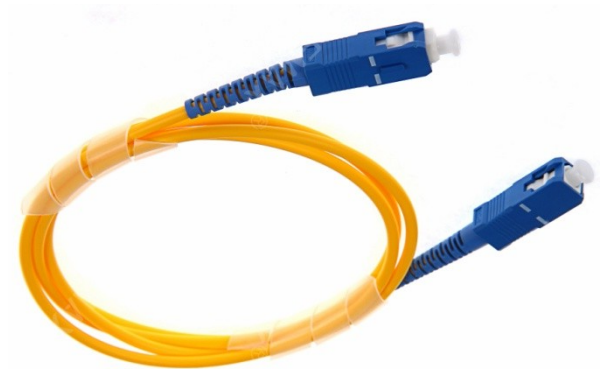

SC to SC SM, simplex

Application

- CATV
- Telecommunication networks
- Active device termination
- Metro
- Local Area Networks (LANs)
- Data processing networks

- Test equipment
- Premise installations
- Wide Area Networks (WANs)

Parameters of Optical Cable

Single Mode	Jacket	OD	Simplex	Duplex	Color	Length
G652D	PVC LSZH	0.9mm 2.0mm 3.0mm	1 core	2 core	Yellow	customized
G655			1 core	2 core	Yellow	customized
G657A1			1 core	2 core	Yellow	customized
G657A2			1 core	2 core	Yellow	customized
Multi Mode	Jacket	OD	Simplex	Duplex	Color	Length
OM1	PVC LSZH	0.9mm 2.0mm 3.0mm	1 core	2 core	Orange	customized
OM2			1 core	2 core	Orange	customized
OM3			1 core	2 core	Aqua	customized
OM4			1 core	2 core	Violet	customized

Operation Temperature: -40°C to +85°C

Storage Temperature: -50°C to +85°C

Parameters of Connectors

Single Mode (SM)	Connector	Insertion Loss				Return Loss				Connector qty for Simplex/ duplex	Housing material
		UPC	≅ 0.3dB	APC	≅ 0.2dB	UPC	≅ 50dB	APC	≅ 55dB		
Single Mode (SM)	LC	UPC	≅ 0.3dB	APC	≅ 0.2dB	UPC	≅ 50dB	APC	≅ 55dB	2/4	Plastic
	SC	UPC	≅ 0.3dB	APC	≅ 0.2dB	UPC	≅ 50dB	APC	≅ 55dB	2/4	Plastic
	FC	UPC	≅ 0.3dB	APC	≅ 0.2dB	UPC	≅ 50dB	APC	≅ 55dB	2/4	Metal
	ST	UPC	≅ 0.3dB	APC	≅ 0.2dB	UPC	≅ 50dB	APC	≅ 55dB	2/4	Metal
Multi Mode (MM)	LC	UPC	≅ 0.3dB	APC	≅ 0.2dB	UPC	≅ 50dB	APC	≅ 55dB	2/4	Plastic
	SC	UPC	≅ 0.3dB	APC	≅ 0.2dB	UPC	≅ 50dB	APC	≅ 55dB	2/4	Plastic
	FC	UPC	≅ 0.3dB	APC	≅ 0.2dB	UPC	≅ 50dB	APC	≅ 55dB	2/4	Metal
	ST	UPC	≅ 0.3dB	APC	≅ 0.2dB	UPC	≅ 50dB	APC	≅ 55dB	2/4	Metal

Durability: ≅ 1000times

For More Information:

Email: sales@telex.cn
www.telex.cn