


## 1U 19 " Cat.5E/6/6A UTP patch panel - 24 ports

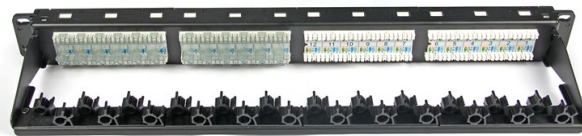

### Electrical:




- Voltage rating: 125 VAC RMS;
- Current rating: 1.5 AMP;
- Contact resistance: 100 Million HMS max;
- Insulation resistance: 1000 MEGOHMS min. @ 500 VDC;
- Dielectric strength: 750 VAC RMS 60 Hz, 1 min.;
- C6 Permanent Link: Conform to ANSI/TIA/EIA-568 B.2-1.

### Environment of Adaptations:

- Storage:  $-40^{\circ} \sim 70^{\circ}$
- Operation:  $-10^{\circ} \sim 60^{\circ}$
- Mates with modular plug conforming to FCC part 68

### Mechanical:

- Housing Material: PBT;
- Panel Frame: ST12, powder conforming in black color
- IDC Material: PC, terminal; phosphor bronze, Tin plating;
- RJ 45 Jack life: 750 times Min.;
- IDC life: 200 times min.;
- Wire: AWG 22-24;
- TIA Cat. 6 Perm. Link Test: Worst pair next margin  $\geq 3.0\text{dB}$ ;
- TIA Cat. 6A perm Link test: worst pair next margin  $\geq 5.0\text{dB}$ ;
- Retentiveness of insertion structure: 50N  $60 \pm 5\text{s}$ .

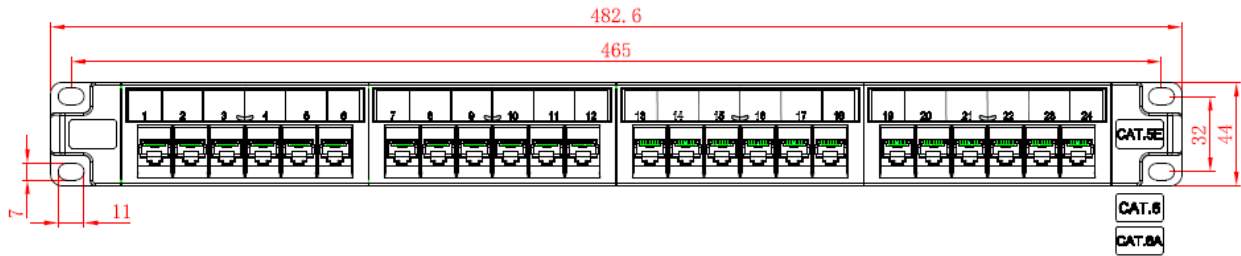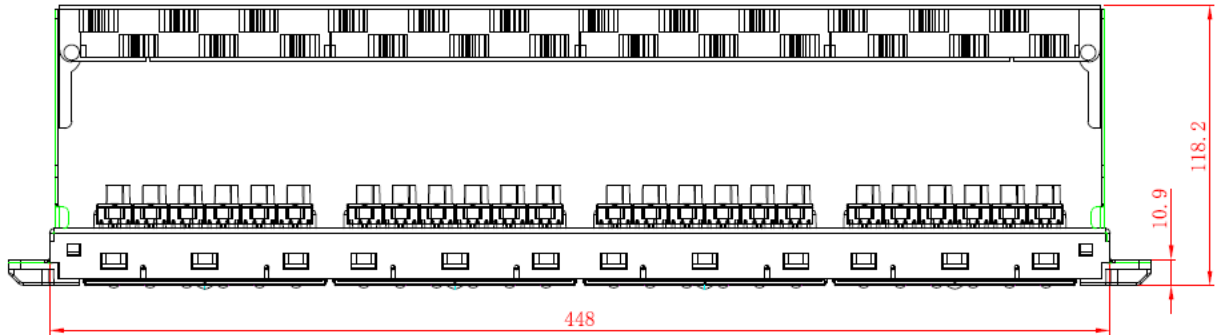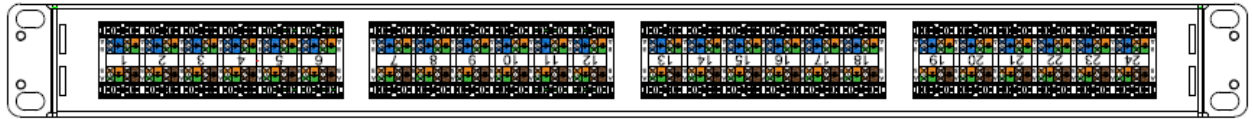

**For More Information:**

Email: [sales@telexmax.cn](mailto:sales@telexmax.cn)

[www.telexmax.cn](http://www.telexmax.cn)