

Cat 6 / 6A UTP Patch Panel 24 Ports, Front Disassemble Design

Part No. : TM03C6PCB03+UTP24



Features:

- 19" rack mountable
- Entire steel outer frame 24 ports UTP patch panel;
- Front disassemble design, each group of ports can be detached from rack.
- Numerically identified ports
- The folded back cable manager can be removed from the panel easily;
- Cat.6/Cat.6a UTP cables with different dimensions can be fixed on the patch panel.
- Fit for Horizontal Distribution in the equipments room and equipments connecting;
- OEM & ODM.

Technical Specifications

Electrical:

- Voltage rating: 125 VAC RMS;
- Current rating: 1.5 AMP;
- Contact resistance: 20 Millions max;
- Insulation resistance: 500 MEGOHMS min @500 VDC;
- Dielectric strength: 750 VAC RMS 60 Hz, 1 min.;
- C6 /C6A Permanent Link: Conform to ANSI/TIA/EIA-568 B.2-1.


Mechanical:

- Housing Material: PBT+15%GF UL94V
- Panel Frame: S45C, powder coating in black color
- IDC Material: PC UL94V. contact: phosphor bronze, Tin plated;
- RJ 45 Jack life: 750 cycles Min.;
- IDC life: 200 times min.;
- Wire: AWG 22-24;
- TIA Cat. 6 Perm. Link Test: Worst pair next margin $\geq 3.0\text{dB}$;
- TIA Cat. 6 Perm. Link Test: Worst pair next margin $\geq 3.0\text{dB}$;
- Retentiveness of insertion structure: 50N $60\pm 5\text{s}$.

Environment of Adaptations:

- Storage: -40°C ~ 70°C
- Operation: -10°C ~ 60°C

Mates with modular plug conforming to FCC part 68, sub-part F.

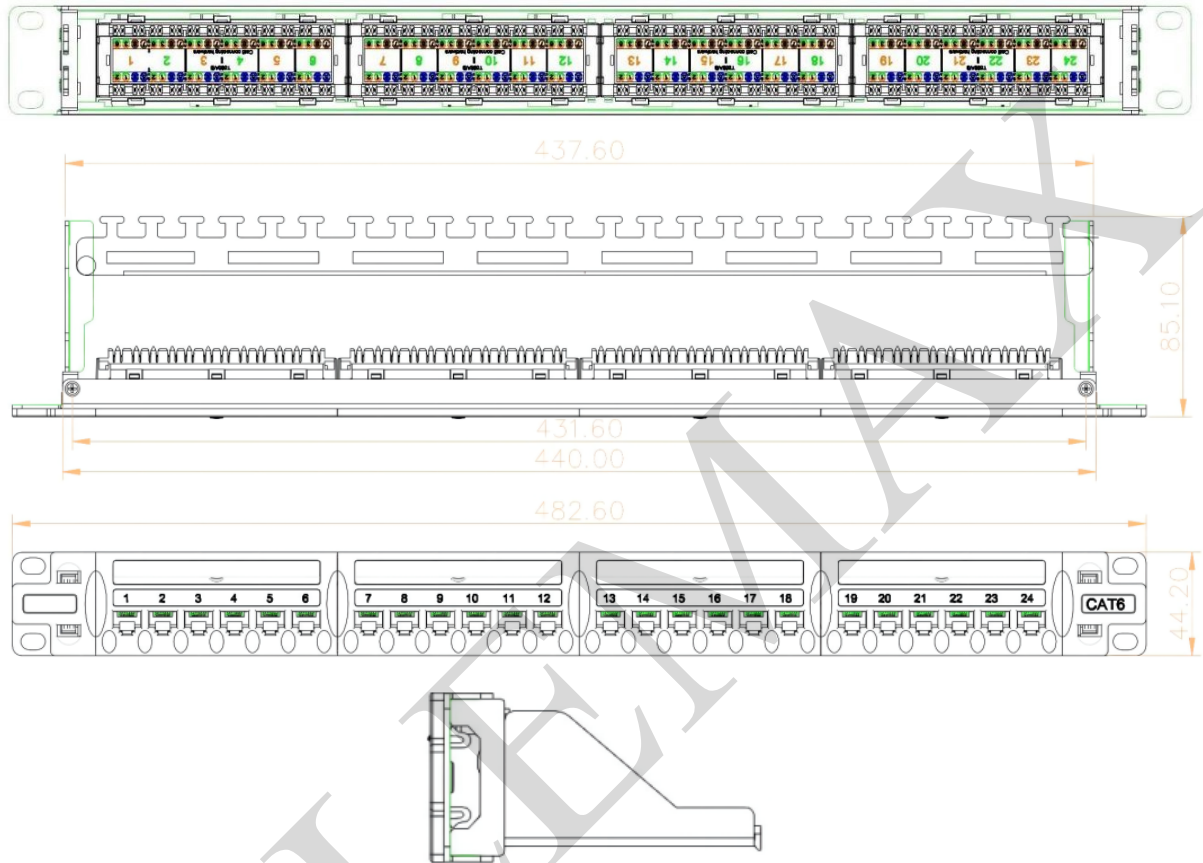

For More Information:

Email: sales@telemax.cn

www.telemax.cn

www.telemaxcable.com