

All-fiber OTDR QX50



Product Features and Functions

- Applicable fiber: SM MM PON;
- <1.8m extra-short event dead zone;
- Up to 32/30dB High Dynamic Range;
- Distance Range: 4, 8, 16, 32, 64, 128, 256km;
- 640*480, 5.7inch TFT-LCD (touch screen);
- 3 years warranty;
- USB interfaces, supporting USB stick and printer and direct cable download to PC via ActiveSync;
- Memory capacity > 800traces;
- Built-in lithium battery with high capacity for over 8 hours of operating life;
- Display: Color LCD.



Shock resistant



Water resistant



Drop resistant



Dust resistant

Product Specification

Wavelength(nm)	850/1300	1310/1550	1310/1550/1625	850/1300+1310/1550
Build-in VFL	Y		N	
Applicable fiber	SM(ITU-T G.652)			
Distance range(km)	0.1,0.5,1,2,5,10,20,30,50,100,200,240			
Pulse width(ns)	5,20,40,80,160,320,640,1280,2560,5120,10240,20480			
Event dead zone(dB)	1.8			
Attenuation dead zone(m)	3			
Dynamic range(dB)	21/23	32/30	32/30/28	21/23+32/30
Optical connector	FC/UPC (SC/LC/ST can be selected)			
Laser class	Class 1m			
Memory of trances	10,000pieces			

Product Selling Points

Support four interface fiber types



FC



ST (Optional)



SC (Optional)



LC (Optional)

GUI interface

GUI interface design, operation is more simple, more intuitive reflection of the measurement results.




Color touch screen

Touch and key make operation more varied. To satisfy different people's habits and improve their work efficiency.





Product details

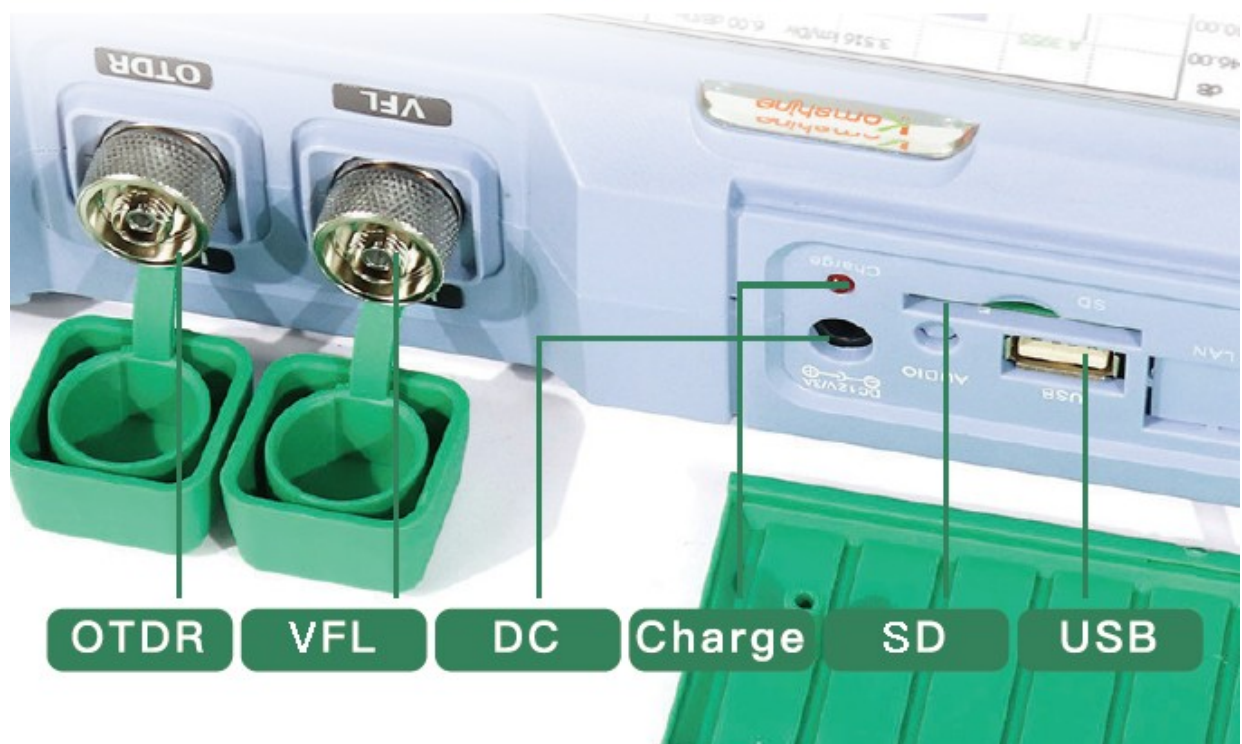

Product Configuration



- Carrying bag ×1
- Strap ×1
- Power cable ×1
- Adapter ×1
- SD card ×1
- Card reader ×1
- Certificate ×1
- Electronic Manual ×1
- Quick Guide ×1
- Calibration Certificate ×1
- Inspection Certificate ×1

For More Information:

Email: sales@telexmax.cn

www.telexmax.cn

www.telexmaxcable.com