


Cat.6A U/FTP Patch Cord

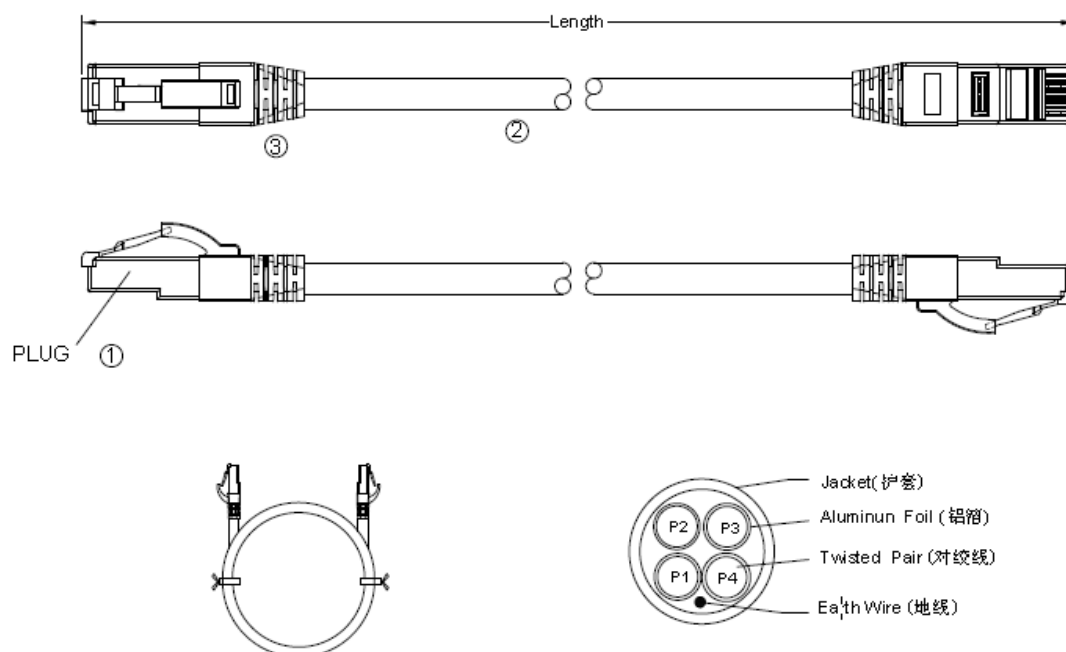

Product Description

Pin Assignment: 线位

Pos. No.	T568B WIRING 568B线位	Pos. No.
1	Orange 桔	1
2	White / Orange 白/桔	2
3	Green 绿	3
6	White / Green 白/绿	6
4	White / Blue 白/蓝	4
5	Blue 蓝	5
7	Brown 棕	7
8	White / Brown 白/棕	8

- All cable 100% channel testing, any open, missing wire, short and intermittent are not permitted.
- After crimping the distance between the bottom of contact and the top surface of plug are 5.90-6.146mm.
- The cable must be tested and passed the channel test with Fluke DSX-8000.
- Rohs compliant PVC or PE or LSZH Jacket.
- Installation temperature: -30℃ to +50℃, minimum bending radius: 8D

NO.	Item	QTY	Description
1	RJ45 PLUG	2 PCS	RJ45 8P8C Contact, phosphor Bronze 3u" , UL94V-0.
2	CABLE	1 PCS	CAT6A U/FTP 26AWG(7*0.16MM)*4P Stranded Cable Jacket, OD: 6.2±0.2MM
3	OVERMODE		48P PVC

For More Information:

Email: sales@telexmax.cn

www.telexmax.cn