


Cat 6 / Cat 6a STP In-Line Coupler

Part No.:



Standard:

ANSI/TIA568.2-D, YD/T 926.3-2009,
ISO/IEC11801

Electrical:

- Insulation Resistance: 500 M Ω
100V/DC/1Min
- Contact Resistance: ≤ 20 m Ω
- Current Rating: 1.5 Amps
- DC Resistance: 0.1 Ω
- DC/AC Volt Endurance: 1000V/AC 750V 1 min

Mechanical:

- Plug Insertion Life ≥ 750 Cycles
- Plug Insertion Force: ≤ 20 N
- Plug Retention Force: ≥ 20 N
- RETENTIVENESS OF INSERTION STRUCTURE: : 50N 60 $\pm$ 5S
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F


Environment of Adaptations:

- Storage temperature: -40°C ~ 75°C
- Operation temperature: -20°C ~ 75°C
- Operating humidity: 10%-90%RH

Physicals:

- Shell material: Zinc alloy plating nickel
- Pin: Phosphor bronze gold over nickel plating, golden plated 3 μ -50 μ
- PCB: FR-4 UL94V-0

Drawing

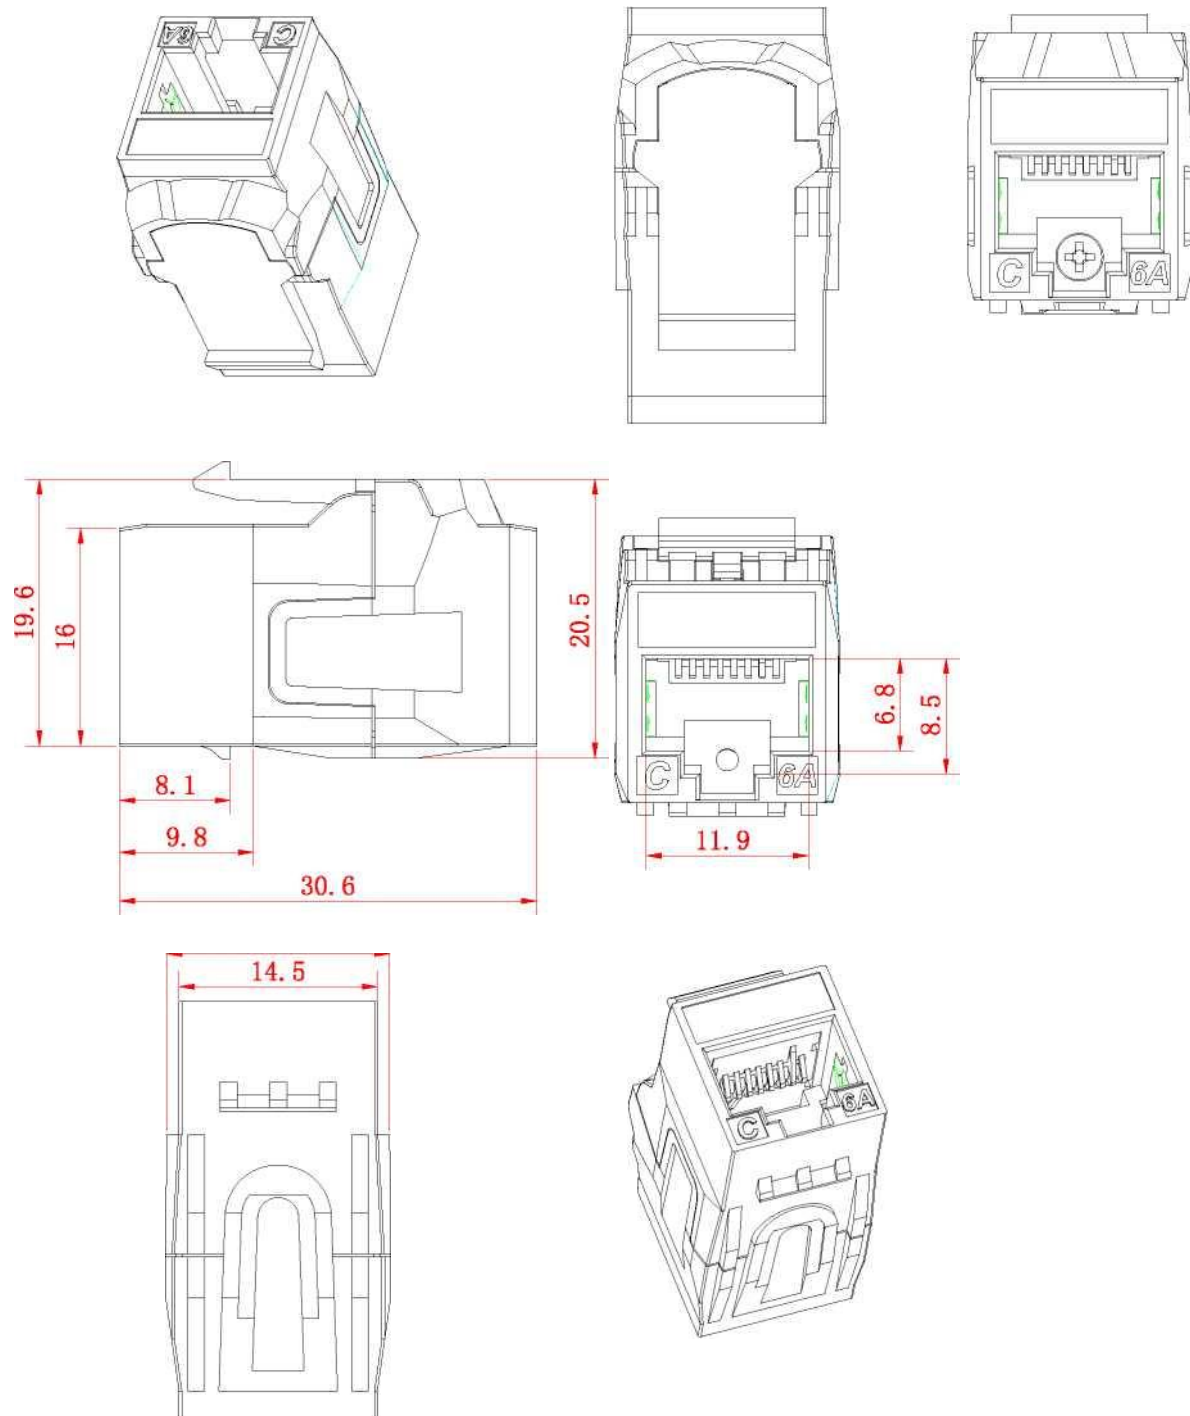

For More Information:

Email: sales@telexmax.cn

www.telexmax.cn

www.telexmaxcable.com