

变更 CHANGE			
版本 EDITI	变更内容 MODIFICATION	变更日期 UPDATE DATE	签名 SIGNATURE

FEATURES:

1 Electrical Test:

- A. Safety Voltage/Current Rating 150V ac, at 1.5A.
- B. Dielectric with standing 1000V/DC/min, <0.5A.
- C. Insulation Resistance: >500M Ω , 1000V./min
- D. Contact Resistance: <20M Ω

2 Mechanical:

- A. Cable-to-Plug tensile strength-20LBs (89N) min.
- B. Durability: 750 mating cycles.
- 3 Operation Temperature: -40 $^{\circ}$ C ~ +85 $^{\circ}$ C.

4 Environmental compliance

- A. the products are compliant with the RoHS, and REACH ETC.

5. Safety standards: UL E239590




特征:

1 电气特性:


- A. 额定电压150伏特AC. 额定电流1.5A
- B. 耐电压测试: 小于0.5安培1000伏特DC/一分钟.
- C. 绝缘抗阻: 1000伏特DC/一分钟, 大于500百萬歐姆
- D. 接觸陰坑: 不大于20m Ω (毫歐姆)

2 机械特性:

- A. 拉力测试-電纜至插座張力強度至少一分钟20磅 (89N)
- B. 耐力测试-拔插测试750次以上.
- 3 使用温度范围: -40 $^{\circ}$ C ~ +85 $^{\circ}$ C
- 4 环保符合性:
 - A. 产品符合RoHS, REACH等环保规格.
- 5 安全标准: UL E239590

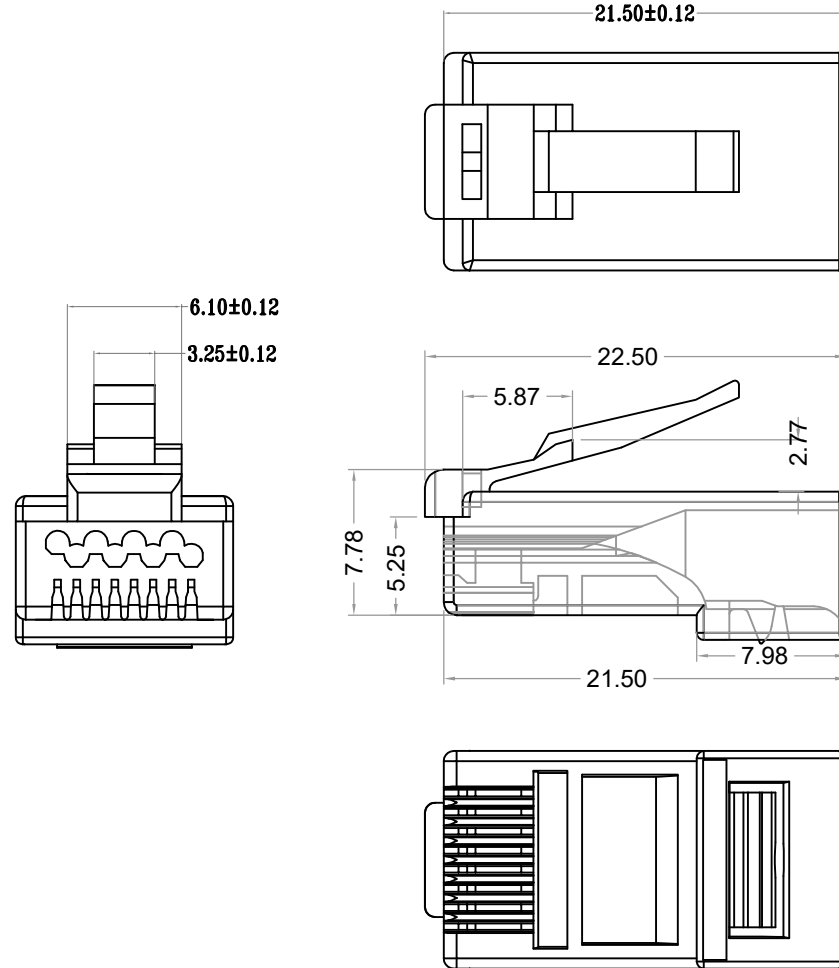

TELEMATX[®] SHENZHEN TELEMATX TECHNOLOGY Co.,LTD

品名规格 DESCRIPTION		六类 双排通孔					页次 SHEET	1/1	
产品编号 PRODUCT NO		01C6T003U2YZF		单位 UNIT	mm	比例 SCALE	1:1	版本 EDITI	A/0
DIMENSION IN mm(Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED x. x ±0.2 x. xx ±0.1 x. xxx ±0.05		第三视角法 THIRD ANGLE PROJECTION 			制图 DRAWN	arvin	日期 DATE	2018. 04. 17	
					核对 CHECK		日期 DATE	2018. 04. 17	
					批准 APPRO	刘悦	日期 DATE	2018. 04. 17	

BLADE:	B10	A10	胶壳 PC(聚碳酸酯) ☐ 94-V0 ☒ 94-V2	1
Drawing			金片 (PIN针) ☒ 黄铜 ☐ 磷铜 Contacts Brass Phosphor copper	8
Mark			☐ G/F" ☐ 1u" ☐ 3u" ☐ 6u" ☐ 15u" ☐ 30u" ☐ 50u" ☐ OTHER	