


High Precision Fiber Cleaver




Traditional bench
top design



48000
Blade life



All-in-1 Universal
fiber holder



$\leq 0.5^\circ$
Cleaved angle



Auto Fiber
Offcut Bin




Characteristics Description


- Traditional bench top design, simple and easy to use
- Blade life 48,000 cleaves
- Typical Cleave Angel 0.5°
- Auto Fiber Offcut Bin
- Applicable to 250 μ m, 900 μ m, 3.0mm fiber cable and flat cable
- Large capacity waste fiber bin, automatic collecting, reduce pollution and scratches



Main Features




Silicone pressure pad can effectively hold down the fiber.



Applicable to 250 μ m, 900 μ m, 3.0mm fiber cable and flat cable.






Tungsten steel refined blade
Wear resistance, high hardness,
corrosion resistance.



Auto Fiber Offcut Bin.





All-in-1 Universal Fiber Holder

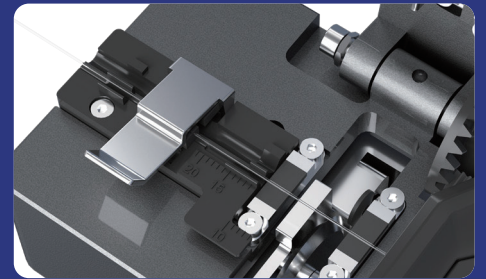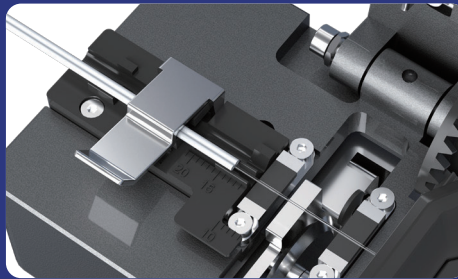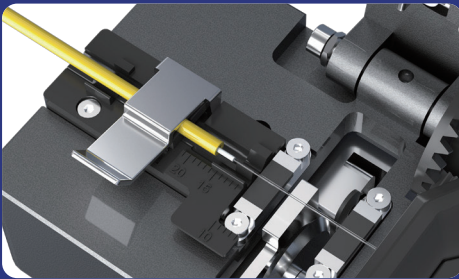

Special carrying case

The card slot in the box is designed to effectively protect the cleaver body from damage.

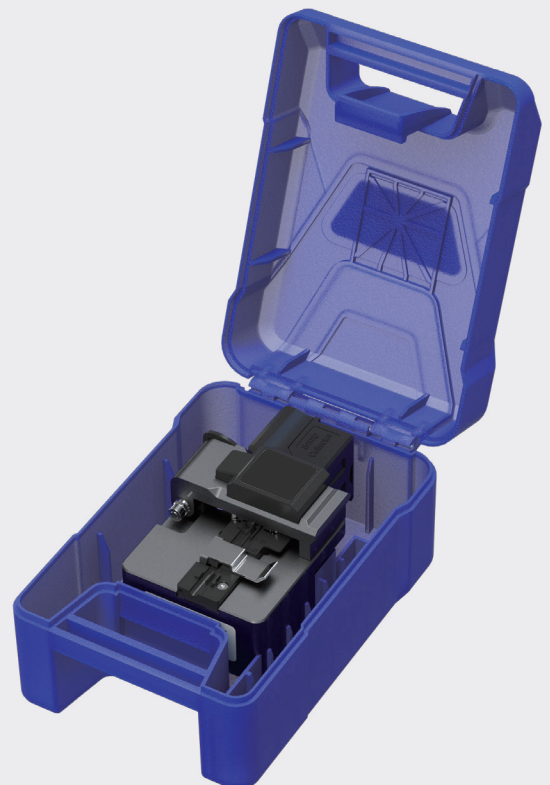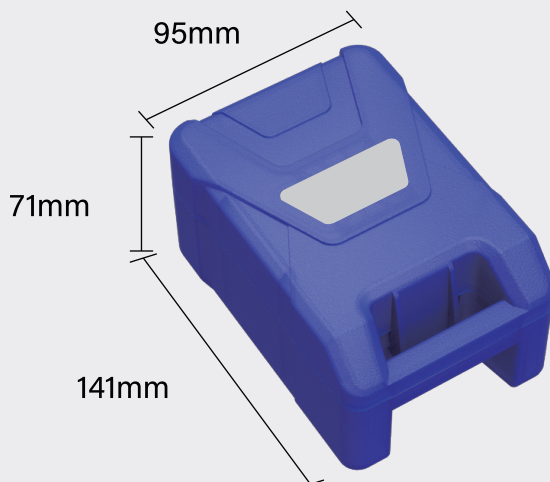



Product Specifications

Fiber Material	Silica glass
Cladding Diameter	125 μ m
Cleaved Length	Single fiber: 8~20mm / Ribbon fiber: 10mm
Applicable Fiber Cable	Single fiber: 250 μ m, 900 μ m, 3.0mm; Fiber cable and flat cable Ribbon fiber: 2 to 12 ribbon fiber cable
Typical Cleaved Angle	Less than 0.5° ★①
Typical Blade Life	Total 48,000 fiber cleaves (replaceable) ★②
Off-cut Collector	Pre-fitted
Type of Offcut Bin	Auto
Auto Return	Pre-fitted
Dimension	83W *77D*63H(mm)
Weight	355g

★① Cleaved angel may vary depending on the operating environment.

★② Blade life is not guaranteed. It may vary depending on the operating environment.



Product Display

