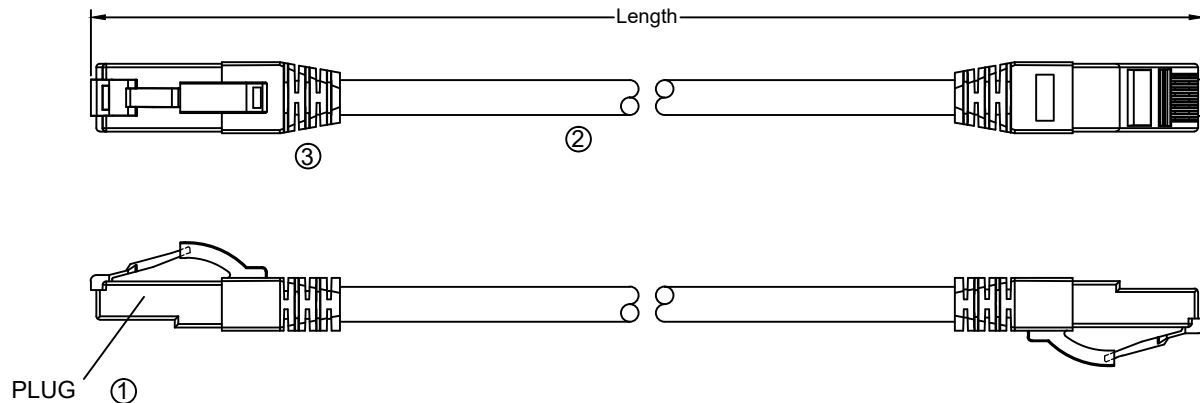


P1 Blue&white/blue (蓝&白/蓝)
P2 Orange&white/orange (桔&白/桔)
P3 Green&white/green (绿&白/绿)
P4 Brown&white/brown (棕&白/棕)

1000

Product Description:

- ⚠ All cable 100% testing, any open, miswiring, short & intermittent are not permitted.
全部导通测试, 无短路、断路现象。
- ⚠ After crimping the distance between the bottom of contact and the top surface of plug are 5.90~6.146mm.
小金钢压着晶片后高度5.90~6.146mm.
- ⚠ RoHS compliant PVC or PE or LSZH Jacket
符合RoHS标准的PVC、PE或低烟无卤外套
- ⚠ Installation temperature -20°C~+75°C; Minimum bending Radius: 8D
安装温度 -20°C~+75°C; 最小折弯半径: 8D

Revisions			
REV.	ECN	Description	DATE
A			

Pin Assignment: 线位

Pos. No.	T568B WIRING 568B线位	Pos. No.
1	Orange 桔	1
2	White/Orange 白/桔	2
3	Green 绿	3
6	White/Green 白/绿	6
4	White/Blue 白/蓝	4
5	Blue 蓝	5
7	Brown 棕	7
8	White/Brown 白/棕	8
9	Earth wire 地线	9

③	注塑护套 Boots		48P PVC
②	线材 Cable	1 PCS	外被 Jacket PVC ☐ PVC-CM ☐ LSZH ☐ CAT 6A U/FTP 30AWG(7/0.10)*4P Stranded Cable OD: 4.7±0.3mm.
①	水晶头 Modular Plug	2 PCS	胶料 Housing 94V-2 ☐ 94V-0 ☐ 黄铜屏蔽壳 Brass Shell Ni: 80u" ☐ Au ☐ 金片 Contacts 6/F" ☐ 1u" ☐ 3u" ☐ 黄铜 Brass ☐ 磷铜 Phosphor copper ☐
NO.	ITEM	QTY	DESCRIPTION

Telemax Technology Co., Ltd

产品编号 PRODUCT NO		品名规格 DESCRIPTION		图号 DWG NO	6AUF1000M95
尺寸公差表 DIMENSIONAL TOLERANCE (针对CHANNEL跳线) ±15MM 2000±20MM 3000±30MM 5000±50MM		单位 UNIT	比例 SCALE	版本 EDIT1	
		第三视角法 THIRD ANGLE PROJECTION 	制图 DRAWN	日期 DATE	
			核对 CHECK	日期 DATE	
			批准 APPROVAL	日期 DATE	

福禄克测试
Fluke Test

点对点测试
Point-to-Point
☐

信道测试
Channel Test
☐

单体测试
Patch Cord Test
☐