



1U 19" Cat6/6A UTP Patch Panel - 24 Ports

TM03C6PCB02+UTP24

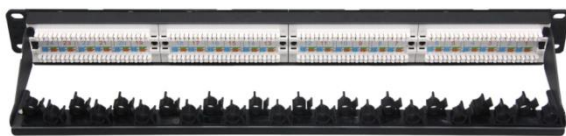

Electrical Performance:

- Insulation Resistance: $\geq 2,500 \text{ M}\Omega$;
- Dielectric Withstanding Voltage: 1,000V AC/DC;
- Current Rating: 15A;
- DC Resistance: $< 100 \text{ m}\Omega$ (STP), $< 200 \text{ m}\Omega$ (UTP);
- Contact Resistance: $< 20 \text{ m}\Omega$

Material:

- Front Panel: ABS;
- IDC Housing: PC (polycarbonate);
- PIN: Phosphor Bronze, Nickel Plated then $\mu 3$
- Gold Plated;
- IDC Terminal: Phosphor Bronze, Nickel Plated;
- PCB Board: FR-4;
- Main Frame: Cold-Rolled Steel;
- Rear Cable Management Clip: Nylon

Special Character:

- Anti wire fall-off design;
- Folded back bar with plastic cable holders;
- Smart design of label holder;
- 2U 48 Ports are optional

Environment of Adaptations:

- Storage: $-40 \sim 70^\circ$
- Operation: $-10 \sim 60^\circ$

For More Information:

Email: sales@telemax.cn

www.telemax.cn

www.telemaxcable.com