

Cat.6/6A Keystone Jack Toeless UTP

Standard:



C6/C6A permanent link: conform to ANSI/TIA/EIA-568 b.2-D. ISO/IEC 11801

Electrical:

- Voltage rating: 125 VAC RMS;
- Current rating: 1.5 AMP;
- Contact resistance: 100 Million HMS max;
- Insulation resistance: 1000 MEGOHMS min. @ 500 VDC;
- Dielectric strength: 750 VAC RMS 60 Hz, 1 min.;
- C6 Permanent Link: Conform to ANSI/TIA/EIA-568 B.2-1.

Mechanical:

- Housing Material: PC;
- Insert Material: PBT;
- PCB Material: FR-4 T=1.2mm;
- Pin: Phosphor Bronze gold over nickel plating, 3u''.
- Contact Material: phosphor bronze stamp pin T=0.35mm;
- IDC Contact Material: phosphor bronze Over nickel plating. T=0.50mm, Tin Plating;
- RJ 45 Jack life:>750 times min.;
- IDC life: >200 times min.;
- Wire: AWG 22-24;
- Retentiveness of insertion structure: 50N 60±5 s.
- Crimping : Toolless, Left – Right Direction

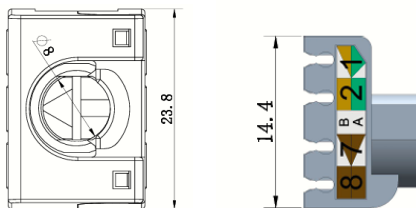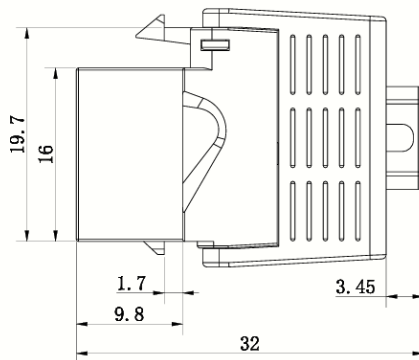

Environment of Adaptations:

- Storage: -40 ° ~ 70 °
- Operation: -10 ° ~ 60 °

For More Information:

Email: sales@telemax.cn

www.telemax.cn